

# 32.5-80 Watt Hybrid

## Features

- Specifically designed for redundant or individual military or aerospace applications
- Completely self contained Thick Film Hybrid DC-DC Converter
- No external filter caps required
- Fully isolated design
- "Inhibit-not" function
- Power on soft start
- 300 kHz operation for low ripple and fast response time
- Built-in EMI input filter meets MIL-STD-461C requirements CE01, CE03, CS01, CS02 and CS06
- Short circuit and overvoltage protection
- Capability of external sync for switching frequencies
- Built-in test capability

## Specifications

**INPUT:** 28 VDC nominal  
 Range: 16 to 50 VDC continuous  
 18 to 50 VDC full power  
 Survives 80 V transients/MIL-STD-704A

### ISOLATION:

Input to case: 500 VDC  
 Input to output: 500 VDC  
 Output to case: 100 VDC

### ENVIRONMENT:

Storage temperature: -55°C to +150°C  
 Shock: 50 G's  
 Acceleration: 500 G's  
 Vibration: 30 G's  
 Grade M:

Full Power Output at  $T_{case} = +85^{\circ}C$   
 Linearly derates to zero at  $T_{case} = +115^{\circ}C$   
 Grade E:

Full Power Output at  $T_{case} = +125^{\circ}C$   
 Linearly derates to zero at  $T_{case} = +135^{\circ}C$

**WEIGHT:** 160 grams typical




### Note

Series 6031 is recommended over 3031 for new designs ("Inhibit not" function yields a higher level of noise immunity).

SINGLE OUTPUT DEVICES		6031-S02 (30W)			6031-S02.5 (37.5W)			6031-S03.3 (50W)			6031-S05 (75W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	—	+1.9	+2.0	+2.1	+2.4	+2.5	+2.6	+3.2	+3.3	+3.4	+4.9	+5.0	+5.1
Output current	$V_{in\ min} - V_{in\ max}$	—	—	15A	—	—	15A	—	—	15A	—	—	15A
Efficiency	$P_{out} = \text{max rated load}$	55%	58%	—	60%	63%	—	65%	68%	—	70%	73%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	10mV	30mV	—	10mV	30mV	—	10mV	30mV	—	10mV	50mV
Load regulation	$P_{out} = 10\% \text{ to F.L.}$	—	10mV	30mV	—	10mV	30mV	—	10mV	30mV	—	10mV	50mV
Output ripple	F.L. BW 2 MHz mV <sub>pp</sub>	—	25	50	—	30	60	—	30	65	—	40	85

SINGLE OUTPUT DEVICES		6031-S05.2 (78W)			6031-S12 (75W)			6031-S15 (75W)			6031-S28 (70W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	—	+5.1	+5.2	+5.3	+11.9	+12.0	+12.1	+14.9	+15.0	+15.1	+27.8	+28.0	+28.2
Output current	$V_{in\ min} - V_{in\ max}$	—	—	15A	—	—	6.25A	—	—	5A	—	—	2.5A
Efficiency	$P_{out} = \text{max rated load}$	70%	73%	—	78%	81%	—	78%	82%	—	77%	81%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	10mV	50mV	—	20mV	100mV	—	25mV	125mV	—	50mV	250mV
Load regulation	$P_{out} = 10\% \text{ to F.L.}$	—	10mV	50mV	—	20mV	100mV	—	25mV	125mV	—	50mV	250mV
Output ripple	F.L. BW 2 MHz mV <sub>pp</sub>	—	40	85	—	60	150	—	75	180	—	150	350

Model No.	Case Style	Pin Count	Mounting
6031	4	12	Solder Sealed PCB Mount with Flange
6031	LF	7	Seam Weld PCB Mount with Flange
6031	ZF	9	Seam Weld PCB Chassis Mount with Flange
6031	PD	11	Solder Sealed Flangeless PCB Stud Mount

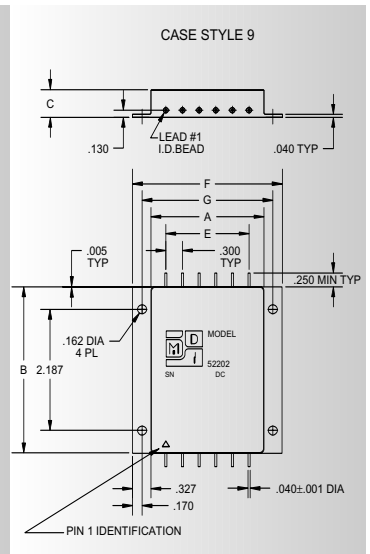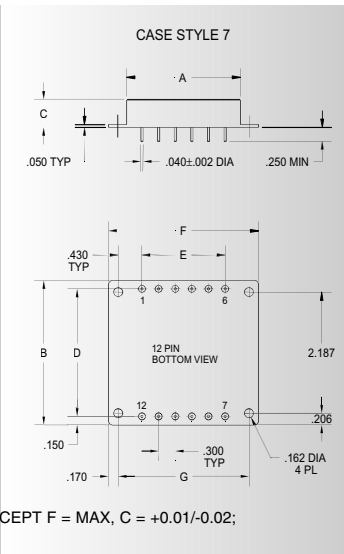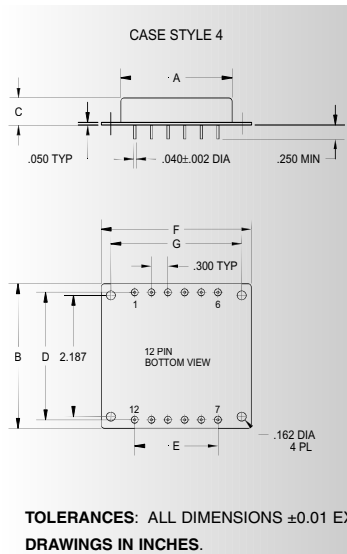

## Case Dimensions


Units: inches | millimeters

Case Style	A	B	C	D	E	F	G
4	2.040   51.816	2.610   66.294	0.495   12.573	2.300   58.420	1.500   38.100	2.710   68.834	2.360   59.944
7 LF	2.040   51.816	2.610   66.294	0.495   12.573	2.300   58.420	1.500   38.100	2.710   68.834	2.360   59.944
9 ZF	2.040   51.816	3.010   76.454	0.495   12.573	—   —	1.500   38.100	2.710   68.834	2.360   59.944
11 PD	2.040   51.816	2.610   66.294	0.495   12.573	2.300   58.420	1.500   38.100	—   —	—   —

# DC-DC CONVERTERS

## FULL FEATURE SERIES

# 6031

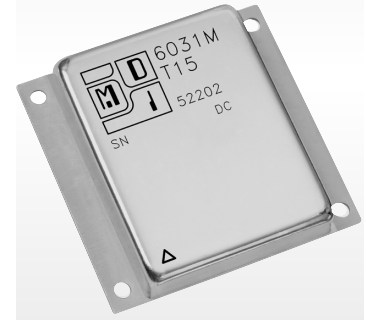

## 28 VDC


0006

DUAL OUTPUT DEVICES		6031-D3.3/5 (31.78W)			6031-D05 (75W)			6031-D12 (74.4W)			6031-D15 (75W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	$+I_{out} = -I_{out}$	+3.2	+3.3	+3.4	+4.9	+5.0	+5.1	+11.9	+12.0	+12.1	+14.9	+15.0	+15.1
		+4.9	+5.0	+5.1	-4.9	-5.0	-5.1	-11.9	-12.0	-12.1	-14.9	-15.0	-15.1
Output current*	$V_{in\ min} - V_{in\ max}$	660mA	—	6.6A	±266mA	—	±7.5A	±158mA	—	±3.1A	±127mA	—	±2.5A
		200mA	—	2A	—	—	—	—	—	—	—	—	—
Efficiency	$P_{out} = \text{max rated load}$	64%	67%	—	72%	75%	—	77%	81%	—	78%	82%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	10mV	30mV	—	±10mV	±50mV	—	±20mV	±100mV	—	±25mV	±125mV
		—	10mV	50mV	—	±10mV	±50mV	—	±20mV	±100mV	—	±25mV	±125mV
Load regulation†	$P_{out} = 10\%$ to F.L.	—	10mV	30mV	—	±10mV	±50mV	—	±20mV	±100mV	—	±25mV	±125mV
		—	10mV	50mV	—	±10mV	±50mV	—	±20mV	±100mV	—	±25mV	±125mV
Output ripple	F.L. BW 2 MHz mV <sub>pp</sub>	—	30	65	—	40	85	—	60	150	—	75	180
		—	25	50	—	—	—	—	—	—	—	—	—

Notes: \*Up to 90% full power available from either output if rated output power is not exceeded; †balanced load conditions.

TRIPLE OUTPUT DEVICES		6031-T3.3/5 (32.25W)			6031-T3.3/12 (42.75W)			6031-T3.3/15 (47.25W)			6031-T05 (32.5W)			6031-T12 (43W)			6031-T15 (47.5W)					
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX			
Output voltage	$+I_{out} = -I_{out}$	+3.2	+3.3	+3.4	+3.2	+3.3	+3.4	+3.2	+3.3	+3.4	+4.9	+5.0	+5.1	+4.9	+5.0	+5.1	+11.9	+12.0	+12.1	+14.9	+15.0	+15.1
		+4.9	+5.0	+5.1	+11.9	+12.0	+12.1	+14.9	+15.0	+15.1	-4.9	-5.0	-5.1	-11.9	-12.0	-12.1	-14.9	-15.0	-15.1	-14.9	-15.0	-15.1
Output current	$V_{in\ min} - V_{in\ max}$	750mA	—	7.5A	750mA	—	7.5A	750mA	—	7.5A	90mA	—	5A	90mA	—	5A	90mA	—	5A	90mA	—	5A
		±40mA	—	±750mA	±40mA	—	±750mA	±32mA	—	±750mA	±40mA	—	±750mA	±40mA	—	±750mA	±32mA	—	±750mA	±32mA	—	±750mA
Efficiency	$P_{out} = \text{max rated load}$	65%	68%	—	65%	68%	—	65%	68%	—	65%	68%	—	70%	73%	—	71%	74%	—	—	—	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV
		—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV
Load regulation	$P_{out} = 10\%$ to F.L.	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV
		—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV
Output ripple	F.L. BW 2 MHz mV <sub>pp</sub>	—	30	65	—	30	65	—	30	65	—	40	85	—	40	85	—	40	85	—	40	85
		—	—	50	—	—	50	—	—	50	—	—	50	—	—	50	—	—	50	—	—	50

CASE STYLE 11

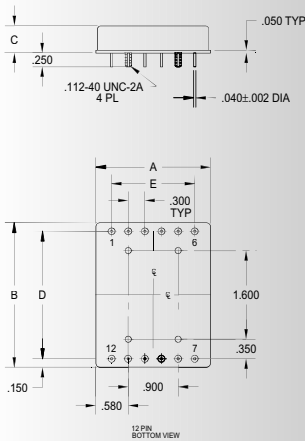

### 6031-SXX output <24 VDC

Pin 1	bit	Pin 7	N/C
Pin 2	inhibit not	Pin 8	main output
Pin 3	soft start	Pin 9	main output ret
Pin 4	sync	Pin 10	+ remote sense
Pin 5	+ input	Pin 11	adjust
Pin 6	input ret	Pin 12	- remote sense

### 6031-SXX output ≥24 VDC

Pin 1	bit	Pin 7	N/C
Pin 2	inhibit not	Pin 8	N/C
Pin 3	soft start	Pin 9	N/C
Pin 4	sync	Pin 10	main output
Pin 5	+ input	Pin 11	N/C
Pin 6	input ret	Pin 12	main output ret

### 6031-DXX

Pin 1	bit	Pin 7	N/C
Pin 2	inhibit not	Pin 8	N/C
Pin 3	soft start	Pin 9	N/C
Pin 4	sync	Pin 10	+ dual output
Pin 5	+ input	Pin 11	dual output ret
Pin 6	input ret	Pin 12	- dual output

### 6031-TXX

Pin 1	bit	Pin 7	N/C
Pin 2	inhibit not	Pin 8	main output
Pin 3	soft start	Pin 9	main output ret
Pin 4	sync	Pin 10	+ dual output
Pin 5	+ input	Pin 11	dual output ret
Pin 6	input ret	Pin 12	- dual output

Please specify **GRADE LEVEL** for your application. Industrial grade units will be shipped if no option is specified.

- M** +85°C military
- E** +125°C military