

12.5-30 Watt Hybrid

Features

- Specifically designed for redundant or individual military or aerospace applications
- Completely self contained Thick Film Hybrid DC-DC Converter
- No external filter caps required
- Fully isolated design
- "Inhibit" function
- Power on soft start
- 200 kHz operation for low ripple and fast response time
- Built-in EMI input filter meets MIL-STD-461C requirements CE01, CE03, CS01, CS02 and CS06
- Short circuit and overvoltage protection
- Capability of external sync for switching frequencies
- Built-in test capability

Specifications

INPUT: 28 VDC nominal
 Range: 16 to 50 VDC continuous
 18 to 50 VDC full power
 Survives 80 V transients/MIL-STD-704A

ISOLATION:
 Input to case: 500 VDC
 Input to output: 500 VDC
 Output to case: 100 VDC

ENVIRONMENT:
 Storage temperature: -55°C to +150°C
 Shock: 50 G's
 Acceleration: 500 G's
 Vibration: 30 G's

Grade M:
 Full Power Output at $T_{case} = +85^{\circ}C$
 Linearly derates to zero at $T_{case} = +115^{\circ}C$


Grade E:
 Full Power Output at $T_{case} = +125^{\circ}C$
 Linearly derates to zero at $T_{case} = +135^{\circ}C$

WEIGHT: 75 grams typical

SINGLE OUTPUT DEVICES		2680-S03.3 (20W)			2680-S05 (30W)			2680-S05.2 (30W)			2680-S12 (30W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	—	+3.2	+3.3	+3.4	+4.9	+5.0	+5.1	+5.1	+5.2	+5.3	+11.9	+12.0	+12.1
Output current	$V_{in\ min} - V_{in\ max}$	—	—	6.06A	—	—	6A	—	—	5.76A	—	—	2.5A
Efficiency	$P_{out} = \text{max rated load}$	67%	70%	—	72%	75%	—	72%	75%	—	79%	83%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	10mV	30mV	—	10mV	50mV	—	10mV	50mV	—	20mV	100mV
Load regulation	$P_{out} = 10\%$ to F.L.	—	10mV	30mV	—	10mV	50mV	—	10mV	50mV	—	20mV	100mV
Output ripple	F.L. BW 2 MHz mV _{pp}	—	30	65	—	40	85	—	40	85	—	60	150

SINGLE OUTPUT DEVICES		2680-S15 (30W)			2680-S28 (30W)				
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX		
Output voltage	—	+14.9	+15.0	+15.1	+27.8	+28.0	+28.2		
Output current	$V_{in\ min} - V_{in\ max}$	—	—	2A	—	—	1.07A		
Efficiency	$P_{out} = \text{max rated load}$	80%	84%	—	79%	83%	—		
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	25mV	125mV	—	50mV	250mV		
Load regulation	$P_{out} = 10\%$ to F.L.	—	25mV	125mV	—	50mV	250mV		
Output ripple	F.L. BW 2 MHz mV _{pp}	—	75	180	—	150	350		

Model No.	Case Style	Pin Count	Mounting
2680	2	12	Solder Sealed Flangeless PCB Mount
2680	F	12	Solder Sealed PCB Mount with Flange
2680	I	12	Seam Weld Flangeless PCB Mount
2680	IF	12	Seam Weld PCB Mount with Flange
2680	WF	8	Seam Weld Chassis Mount with Flange
2680	PB	10	Solder Sealed Flangeless PCB Stud Mount
2680	PE	12	Seam Weld Flangeless PCB Stud Mount

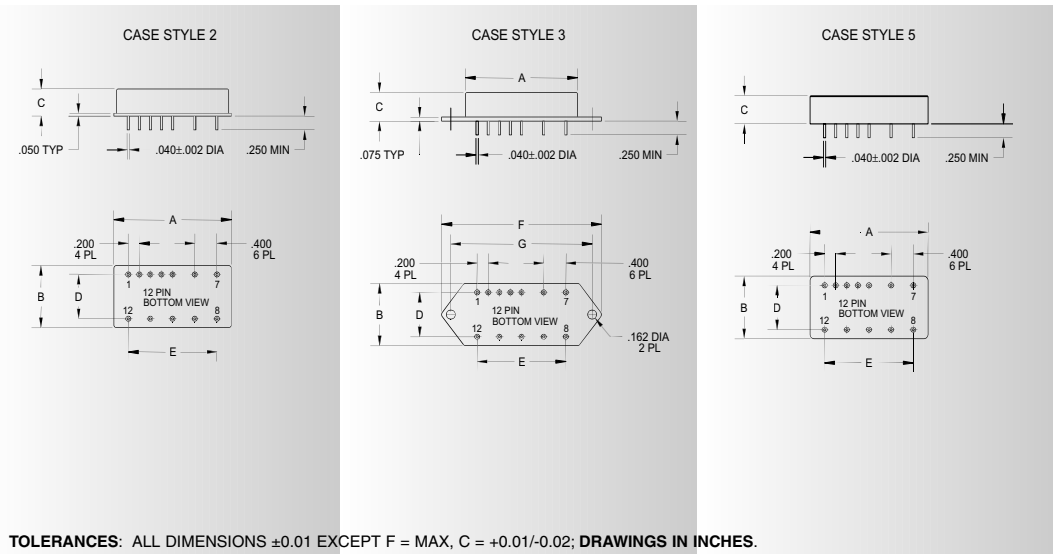

Case Dimensions


Units: inches | millimeters

Case Style	A	B	C	D	E	F	G
2	2.200 55.880	1.350 34.290	0.495 12.573	1.000 25.400	1.600 40.640	— —	— —
3 F	2.200 55.880	1.350 34.290	0.495 12.573	1.000 25.400	1.600 40.640	2.960 75.184	2.610 66.294
5 I	2.225 56.515	1.350 34.290	0.495 12.573	1.000 25.400	1.600 40.640	— —	— —
6 IF	2.225 56.515	1.350 34.290	0.495 12.573	1.000 25.400	1.600 40.640	2.960 75.184	2.610 66.294
8 WF	2.225 56.515	1.710 43.434	0.495 12.573	— —	1.600 40.640	2.960 75.184	2.610 66.294
10 PB	2.225 56.515	1.350 34.290	0.495 12.573	1.000 25.400	1.600 40.640	— —	— —
12 PE	2.225 56.515	1.350 34.290	0.495 12.573	1.000 25.400	1.600 40.640	— —	— —

DC-DC CONVERTERS

FULL FEATURE SERIES

2680

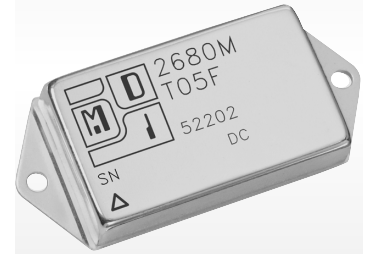





28 VDC

0006

DUAL OUTPUT DEVICES		2680-D05 (30W)			2680-D12 (30W)			2680-D15 (30W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	$+I_{out} = -I_{out}$	+4.9	+5.0	+5.1	+11.9	+12.0	+12.1	+14.9	+15.0	+15.1
		-4.9	-5.0	-5.1	-11.9	-12.0	-12.1	-14.9	-15.0	-15.1
Output current*	$V_{in\ min} - V_{in\ max}$	±150mA	—	±3A	±95mA	—	±1.25A	±76mA	—	±1A
Efficiency	$P_{out} = \text{max rated load}$	73%	77%	—	79%	83%	—	80%	84%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	±10mV	±50mV	—	±20mV	±100mV	—	±25mV	±125mV
Load regulation†	$P_{out} = 10\%$ to F.L.	—	±10mV	±50mV	—	±20mV	±100mV	—	±25mV	±125mV
Output ripple	F.L. BW 2 MHz mV _{pp}	—	40	85	—	60	150	—	75	180

Notes: *Up to 90% full power available from either output if rated output power is not exceeded; †balanced load conditions.

TRIPLE OUTPUT DEVICES		2680-T3.3/5 (12.5W)			2680-T3.3/12 (17.5W)			2680-T3.3/15 (17.5W)			2680-T05 (12.5W)			2680-T12 (17.5W)			2680-T15 (17.5W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	$+I_{out} = -I_{out}$	+3.2	+3.3	+3.4	+3.2	+3.3	+3.4	+3.2	+3.3	+3.4	+4.9	+5.0	+5.1	+4.9	+5.0	+5.1	+4.9	+5.0	+5.1
		+4.9	+5.0	+5.1	+11.9	+12.0	+12.1	+14.9	+15.0	+15.1	+4.9	+5.0	+5.1	+11.9	+12.0	+12.1	+14.9	+15.0	+15.1
		-4.9	-5.0	-5.1	-11.9	-12.0	-12.1	-14.9	-15.0	-15.1	-4.9	-5.0	-5.1	-11.9	-12.0	-12.1	-14.9	-15.0	-15.1
Output current	$V_{in\ min} - V_{in\ max}$	300mA	—	3A	300mA	—	3A	300mA	—	3A	90mA	—	2A	90mA	—	2A	90mA	—	2A
		±40mA	—	±250mA	±40mA	—	±312mA	±32mA	—	±250mA	±40mA	—	±250mA	±40mA	—	±312mA	±32mA	—	±250mA
Efficiency	$P_{out} = \text{max rated load}$	67%	70%	—	67%	70%	—	67%	70%	—	67%	70%	—	72%	75%	—	72%	75%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV
		—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV
Load regulation	$P_{out} = 10\%$ to F.L.	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV	—	10mV	50mV
		—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV	—	25mV	50mV
Output ripple	F.L. BW 2 MHz mV _{pp}	—	30	65	—	30	65	—	30	65	—	40	85	—	40	85	—	40	85
		—	—	50	—	—	50	—	—	50	—	—	50	—	—	50	—	—	50

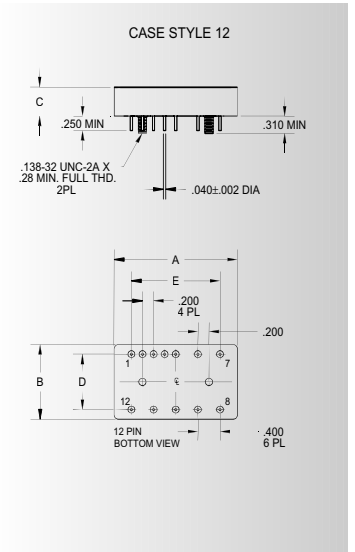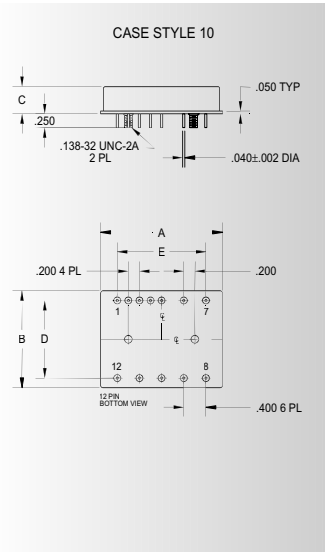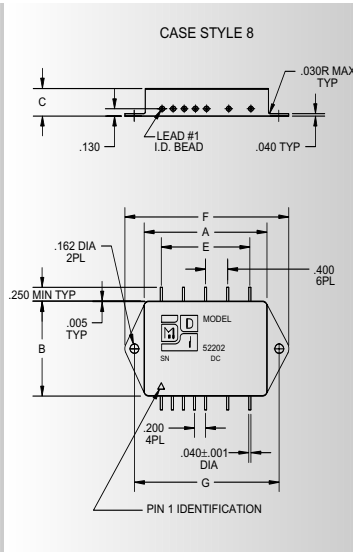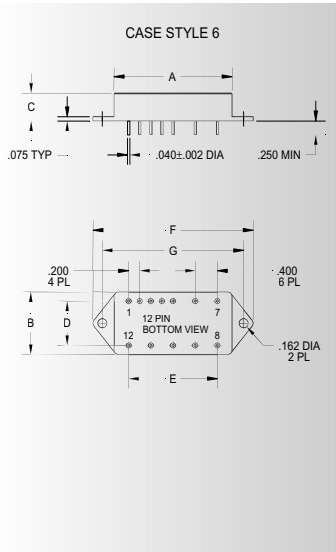

2680-SXX output <24 VDC

Pin 1	bit	Pin 7	+ input
Pin 2	inhibit	Pin 8	main output
Pin 3	soft start	Pin 9	main output ret
Pin 4	sync	Pin 10	+ remote sense
Pin 5	N/C	Pin 11	adjust
Pin 6	input ret	Pin 12	- remote sense

2680-SXX output ≥24 VDC

Pin 1	bit	Pin 7	+ input
Pin 2	inhibit	Pin 8	N/C
Pin 3	soft start	Pin 9	N/C
Pin 4	sync	Pin 10	main output
Pin 5	N/C	Pin 11	N/C
Pin 6	input ret	Pin 12	main output ret

2680-DXX

Pin 1	bit	Pin 7	+ input
Pin 2	inhibit	Pin 8	N/C
Pin 3	soft start	Pin 9	N/C
Pin 4	sync	Pin 10	+ dual output
Pin 5	N/C	Pin 11	dual output ret
Pin 6	input ret	Pin 12	- dual output

2680-TXX

Pin 1	bit	Pin 7	+ input
Pin 2	inhibit	Pin 8	main output
Pin 3	soft start	Pin 9	main output ret
Pin 4	sync	Pin 10	+ dual output
Pin 5	N/C	Pin 11	dual output ret
Pin 6	input ret	Pin 12	- dual output

Please specify **GRADE LEVEL** for your application. Industrial grade units will be shipped if no option is specified.

- M** +85°C military
- E** +125°C military