


HYBRID SOLID STATE RELAY

Bi-Directional Solid State Relay

MODEL 3819



Features:

- High Voltage/Low Resistance
- Single Pole, Single Throw Form normally open
- Bi-directional current flow
- Wide Band Gap Semiconductors for low Resistance
- Magnetically Coupled Command for fast response
- No Optocoupler, no optocoupler issues
- Logic Level Drive
- Rugged Hermetic Package

Specifications:

Bias Input Voltage 4.7 to 5.3 VDC

Bias input current 30 mA typical, 50 mA maximum

Command input 1 mA compatible with TTL logic levels

Input/output and all pins to case isolation 1kV

Power Dissipation 8 watts at maximum rated case temperature

Case temperature range:

Operating -55°C to +70°C (Industrial grade)

Operating -55°C to +125°C (E grade)

Operating -55°C to +85°C (M grade)

Storage -65°C to +150°C

Weight 32 grams typical

For continuous operation, connect 5 VDC bias from pin 10 & 11 to bias ground pin 12 & 13.

Ground pin 15 to energize the SSR.

Power Dissipation:

Total steady state power dissipation of the model 3819 is limited to 8 watts provided the baseplate temperature is limited to the rated temperature.

Model 3819 is a 5 A SPST form A (normally closed when de-energized) Bi-directional SSR.

Model 3819 uses Wide Bandgap power semiconductors for high performance, and is magnetically coupled.


Wide band gap (WBG) semiconductors, such as GaN (Gallium Nitride) provide an order of magnitude improvement in SSR voltage drop compared to SSRs using Silicon based power devices.

Also, WBG semiconductors of a given dimension can withstand higher electric fields than Silicon semiconductors, the physical dimensions of these WBG parts are considerably smaller than their Silicon competitors. The result of WBG is much lower channel resistances and reduced drive requirements.

Many SSR manufacturers drive their SSR power device with opto couplers consisting of an LED emitter driving a multi-diode photo-voltaic stack.

Both the LED's and photovoltaic stacks are challenged by wide temperature environments. A second disadvantage of opto coupled drive is slow turn on and turn off response.

MDI replaces the optocoupler function with a tiny, transformer isolated RF drive signal. This solves the opto coupler problems and gives faster and more temperature stable operation.

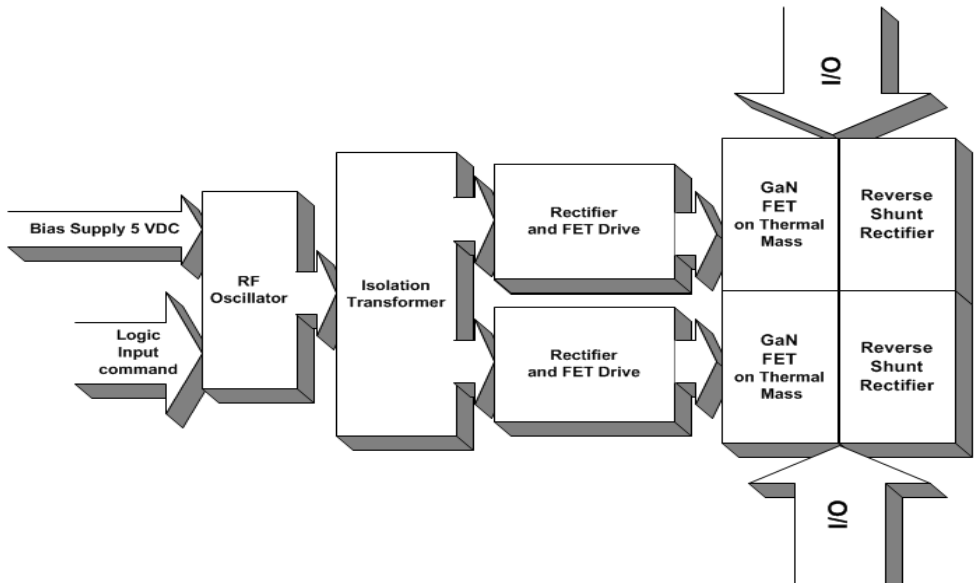

500V Solid State Relay
Model 3819 5A Bi-directional Form A

PARAMETER	CONDITION	MIN	TYP	MAX
Contact Rating V	Max	—	—	500V
Contact Rating I	Max	—	—	5A
Contact Resistance, 25°C	Energized	—	0.3Ω	0.4 Ω
Contact Resistance, 125°C	Energized	—	0.5 Ω	0.8Ω
Leakage Current, 500V, 25°C	Off	—	—	30μA
Leakage Current, 500V, 125°C	Off	—	—	50μA
Bias Voltage	—	4.7	5.0	5.3V
Bias Current	—	—	30	50mA
Command Current	—	1	2	3.0mA
Delay Time, energized	—	—	5	15μS
Delay Time, de-energized	—	—	10	20μS
Energize Time, dynamic	—	—	10	20μS
De-energize time, dynamic	—	—	10	20μS

For Heat Removal and Mounting Recommendations See MDI application notes on mounting considerations for DC-DC Converters. Model 3819 is packaged in a case style 15 package.




Modular Devices, Inc.

Power Conversion for Space and Military/Aerospace

Modular Devices, Inc • One Roned Road • Shirley, New York 11967 • E-mail sales@mdipower.com • Fax 631.345.3106 • Tel 631.345.3100

BI-DIRECTIONAL SOLID STATE RELAY

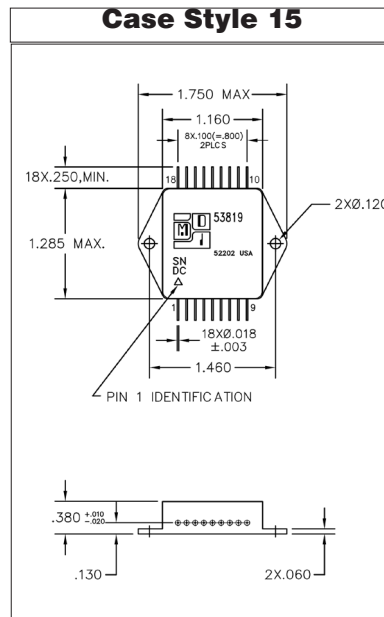

Pin Out Chart	
Pin 1	N/C
Pin 2	N/C
Pin 3	I/O #1
Pin 4	I/O #1
Pin 5	I/O #1
Pin 6	N/C
Pin 7	I/O #2
Pin 8	I/O #2
Pin 9	I/O #2
Pin 10	Bias +5VDC
Pin 11	Bias +5VDC
Pin 12	Bias Return
Pin 13	Bias Return
Pin 14	N/C
Pin 15	Ground To Energize
Pin 16	N/C
Pin 17	N/C
Pin 18	Case Ground

Model No.	Case Style	Pin Count	Mounting
3819	15	18	Seam Weld Chassis Mount with Flange

GRADE LEVELS:

Please specify grade level for your application. EU grade units will be shipped if no option is specified.

I Industrial -55°C to +70°C

M Military -55°C to +85°C

E Military -55°C to +125°C



Modular Devices, Inc.
Power Conversion for Space and Military/Aerospace

Modular Devices, Inc. • One Roned Road • Shirley, New York 11967 • E-mail sales@mdipower.com • Fax 631.345.3106 • Tel **631.345.3100**