

19.5-40 Watt Hybrid

Features

- Specifically designed for redundant or individual military or aerospace applications
- Completely self contained Thick Film Hybrid DC-DC Converter
- No external filter caps required
- Fully isolated design
- "Inhibit" function
- Power on soft start
- 200 kHz operation for low ripple and fast response time
- Built-in EMI input filter meets MIL-STD-461C requirements CE01, CE03, CS01, CS02 and CS06
- Short circuit and overvoltage protection
- Capability of external sync for switching frequencies
- Built-in test capability

Specifications

INPUT: 28 VDC nominal
 Range: 16 to 50 VDC continuous
 18 to 50 VDC full power
 Survives 80 V transients/MIL-STD-704A

ISOLATION:

Input to case: 500 VDC
 Input to output: 500 VDC
 Output to case: 100 VDC

ENVIRONMENT:

Storage temperature: -55°C to +150°C
 Shock: 50 G's
 Acceleration: 500 G's
 Vibration: 30 G's

Grade M:

Full Power Output at $T_{case} = +85^{\circ}C$
 Linearly derates to zero at $T_{case} = +115^{\circ}C$


Grade E:
 Full Power Output at $T_{case} = +125^{\circ}C$
 Linearly derates to zero at $T_{case} = +135^{\circ}C$

WEIGHT: 90 grams typical

SINGLE OUTPUT DEVICES		3193-S03.3 (26.4W)			3193-S05 (40W)			3193-S05.2 (40W)			3193-S12 (40W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	—	+3.2	+3.3	+3.4	+4.9	+5.0	+5.1	+5.1	+5.2	+5.3	+11.9	+12.0	+12.1
Output current	$V_{in\ min} - V_{in\ max}$	—	—	8A	—	—	8A	—	—	7.69A	—	—	3.33A
Efficiency	$P_{out} = \text{max rated load}$	67%	70%	—	72%	75%	—	72%	75%	—	79%	83%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	10mV	30mV	—	10mV	50mV	—	10mV	50mV	—	20mV	100mV
Load regulation	$P_{out} = 10\%$ to F.L.	—	10mV	30mV	—	10mV	50mV	—	10mV	50mV	—	20mV	100mV
Output ripple	F.L. BW 2 MHz mV _{pp}	—	30	65	—	40	85	—	40	85	—	60	150

SINGLE OUTPUT DEVICES		3193-S15 (40W)			3193-S28 (40W)								
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX						
Output voltage	—	+14.9	+15.0	+15.1	+27.8	+28.0	+28.2						
Output current	$V_{in\ min} - V_{in\ max}$	—	—	2.67A	—	—	1.43A						
Efficiency	$P_{out} = \text{max rated load}$	80%	84%	—	79%	83%	—						
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	25mV	125mV	—	50mV	250mV						
Load regulation	$P_{out} = 10\%$ to F.L.	—	25mV	125mV	—	50mV	250mV						
Output ripple	F.L. BW 2 MHz mV _{pp}	—	75	180	—	150	350						

Model No.	Case Style	Pin Count	Mounting
3193	2	12	Solder Sealed Flangeless PCB Mount
3193	F	3	Solder Sealed PCB Mount with Flange
3193	J	5	Seam Weld Flangeless PCB Mount
3193	JF	6	Seam Weld PCB Mount with Flange
3193	XF	8	Seam Weld Chassis Mount with Flange
3193	PC	10	Solder Sealed Flangeless PCB Stud Mount

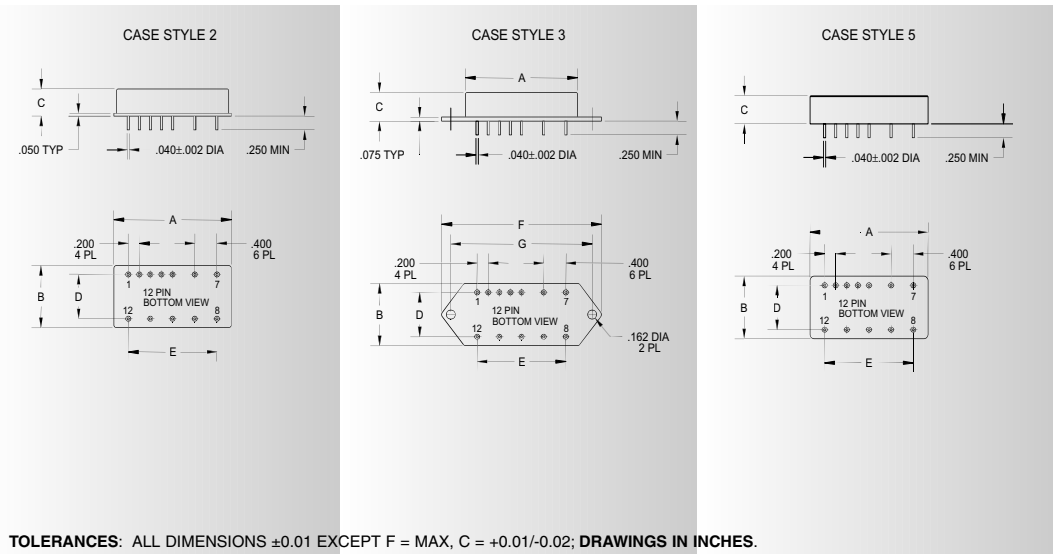

Case Dimensions

Units: inches | millimeters

Case Style	A	B	C	D	E	F	G
2	2.200 55.880	1.750 44.450	0.495 12.573	1.400 35.560	1.600 40.640	— —	— —
3 F	2.200 55.880	1.750 44.450	0.495 12.573	1.400 35.560	1.600 40.640	2.960 75.184	2.610 66.294
5 J	2.225 56.515	1.750 44.450	0.495 12.573	1.400 35.560	1.600 40.640	— —	— —
6 JF	2.225 56.515	1.750 44.450	0.495 12.573	1.400 35.560	1.600 40.640	2.960 75.184	2.610 66.294
8 XF	2.225 56.515	2.100 53.340	0.495 12.573	— —	1.600 40.640	2.960 75.184	2.610 66.294
10 PC	2.225 56.515	1.750 44.450	0.495 12.573	1.400 35.560	1.600 40.640	— —	— —

