


Series 3270

120 Watt DC – DC Converters

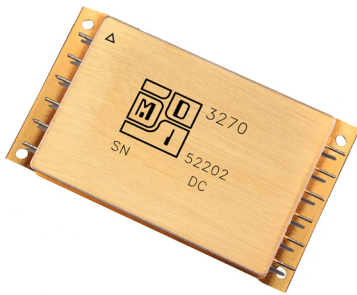

270 Volts DC Input

Features

- Specifically designed for demanding military and aerospace applications where best value is critical.
- Rugged hermetic package
- High power density
- High efficiency
- Survives MIL-STD-704 surges
- Soft start
- Input to outputs magnetically isolated
- Single outputs have remote sense pins
- Sync Input
- Input ripple filter
- Output common mode filters
- No external components required

Specifications

INPUT: 270 VDC nominal
 Range: 160 to 400 VDC continuous
 Survives 450 V surges

ISOLATION:

Input to case: 500 VDC
 Input to output: 500 VDC
 Output to case: 100 VDC
 10MΩ minimum at 500 VDC input to output and input to case.

ENVIRONMENT:

Storage temperature: -55°C to +150°C
 Shock: 50 G's
 Acceleration: 500 G's
 Vibration: 30 G's

Grades: Industrial:

Full Power Output at $T_{case} = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$
 Lineary derates to zero at $T_{case} = +115^{\circ}\text{C}$

Grades M:

Full Power Output at $T_{case} = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$
 Lineary derates to zero at $T_{case} = +115^{\circ}\text{C}$

Grades E:

Full Power Output at $T_{case} = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
 Lineary derates to zero at $T_{case} = +135^{\circ}\text{C}$

WEIGHT: 120 grams typical

SINGLE OUTPUT DEVICES		3270-S3.3 (66W)			3270-S05 (100W)			3270-S12 (120W)			3270-S15 (120W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	—	+3.2	+3.3	+3.4	+4.9	+5.0	+5.1	+11.8	+12.0	+12.2	+14.7	+15.0	+15.3
Output current	$V_{in\ min} - V_{in\ max}$	—	—	20A	—	—	20A	—	—	10A	—	—	8A
Efficiency	$P_{out} = \text{max rated load}$	78 %	84%	—	79%	86%	—	79%	86%	—	82%	88%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	33mV	66mV	—	50mV	100mV	—	120mV	240mV	—	150mV	300mV
Load regulation	$P_{out} = 10\%$ to F.L.	—	70mV	132mV	—	60mV	150mV	—	240mV	360mV	—	180mV	450mV
Output ripple	F.L. BW 2 MHz mV_{pp}	—	50	100	—	50	100	—	120	240	—	150	300

SINGLE OUTPUT DEVICES		3270-S28 (120W)		
PARAMETER	CONDITION	MIN	TYP	MAX
Output voltage	—	+27.4	+28.0	+28.6
Output current	$V_{in\ min} - V_{in\ max}$	—	—	4.3A
Efficiency	$P_{out} = \text{max rated load}$	81%	87%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	280mV	560mV
Load regulation	$P_{out} = 10\%$ to F.L.	—	132mV	340mV
Output ripple	F.L. BW 2 MHz mV_{pp}	—	50	600

DUAL OUTPUT DEVICES		3270-D05 (100W)			3270-D12 (120W)			3270-D15 (120W)		
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX
Output voltage	—	+4.9	+5.0	+5.1	+11.8	+12.0	+12.2	+14.7	+15.0	+15.3
Output current*	$V_{in\ min} - V_{in\ max}$	—	—	±10A	—	—	±5A	—	—	±4A
Efficiency	$P_{out} = \text{max rated load}$	77%	84%	—	77%	84%	—	78%	86%	—
Line regulation	$P_{out} = \text{max rated load}$ $V_{in\ min} - V_{in\ max}$	—	±50mV	±100mV	—	±120mV	±240mV	—	±150mV	±300mV
Load regulation†	$P_{out} = 10\%$ to F.L.	—	±60mV	±150mV	—	±240mV	±360mV	—	±180mV	±450mV
Output ripple	F.L. BW 2 MHz mV_{pp}	—	50	100	—	120	240	—	150	300


Notes: *Up to 90% full power available from either output if rated output power is not exceeded; †balanced load conditions.

Pin Outs

3270-SXX	
Pin 1	+28V Input
Pin 2	Input Return
Pin 3	Output Adjust
Pin 4	Inhibit Not
Pin 5	Sync Out
Pin 6	Sync In
Pin 7	+V Output
Pin 8	Output Return
Pin 9	Sense Return
Pin 10	+ Sense
Pin 11	N/C
Pin 12	N/C

Case ground via mounting flange

3270-DXX	
Pin 1	+28V Input
Pin 2	Input Return
Pin 3	Case Gnd
Pin 4	Inhibit Not
Pin 5	Sync Out
Pin 6	Sync In
Pin 7	+V Output
Pin 8	Output Return
Pin 9	-V Output
Pin 10	Output Adjust
Pin 11	N/C
Pin 12	N/C

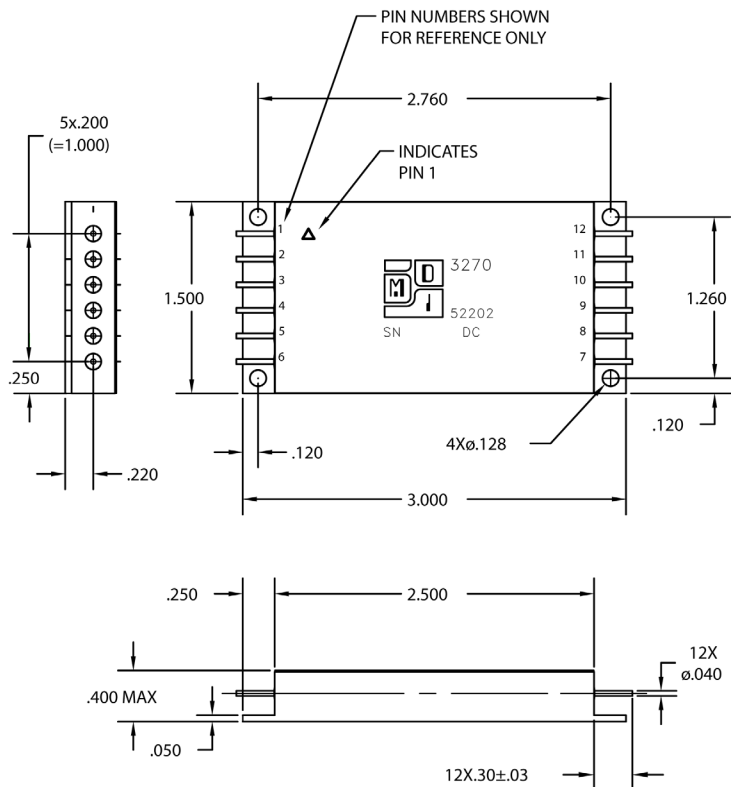

Modular Devices, Inc.
 Power Conversion for Space and Military/Aerospace

One Roned Road • Shirley, NY 11967 • E-mail sales@mdpowers.com • Fax: 631.345.3106 • Tel 631.345.3100

Released 2018-06-20