


# 73865 500 Watt Proton Rad Hard 100K +<sup>®</sup> EMI Filtered Space Power Supply

## High Power DC - DC Converter

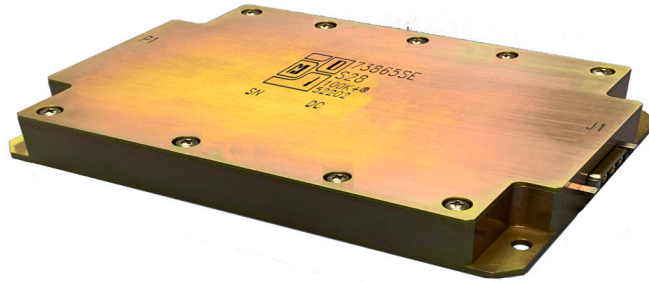

Model	Nominal Vin	Vin Range	Applications
73865	50	30 - 75	50VDC Satellite Bus

The 73865 DC-DC converters are a family of fully isolated 500 watt rated modules that provide high reliability power for critical space environment applications needing higher power than full hybrid DC-DC converters can offer.

The circuit topology of the 73865 provides superior SEU and 100K+ TID performance.

The units include a fall input EMI filter and user adjustable under voltage lockout is included. Outputs include high attenuation ripple and common mode spike filtering.

The 73865 converter is constructed with an optimum combination of hermetic hybrid control circuits and high reliability passive surface mount components, offering a construction that is suitable for the most demanding space applications, while providing reliable conduction cooled thermal paths for all components.

### Specifications

#### Single Outputs:

Output Voltage V	12	15	28
Output Current A	42	33	18
Efficiency %	83.5%	85.5%	85.5%
Line/Load Regulation %	2%	2%	2%
Output Ripple mVpp, max	120	150	200

#### Dual Outputs:

Output Voltage V	±12	±15
Output Current A	21	16
Efficiency %	84%	86%
Line/Load Regulation %	2%	2%
Output Ripple mVpp, max	120	150

Custom input and output voltages are available.

#### Environment:

Operating Temperature Range -55°C to +100°C baseplate  
Non-operating Storage Temperature Range -65°C to +150°C ambient

Shock: 20 G's

Vibration: 12 G's

#### Notes:

Data for 25°C operating baseplate temps.

Output Voltage: Nominal shown. Factory setpoint within ±1% at nominal input and full rated load.

Output Current: Max. shown at nominal input voltage.

Efficiency: Min. shown at nominal input and full rated load.

Line/Load Regulation: Max. Combined over Input Voltage and Load ranges listed.

Output Ripple: Full load resistive, 20 MHz bandwidth.

### Features

#### Electrical Design Features:

#### Fully Isolated MDI Proton RadHard 100K+<sup>®</sup> Technology:

Proton resistant I/O Isolation: no optical couplers used.

Over 100kRad Si TID.

SEE/SEU Immune: LET>82MeV\*cm<sup>2</sup>mg.

**Input Undervoltage Lockout:** User programmable UV lock with hysteresis to shut operation at line inputs under selected limit.

**Sync Input:** Synchronizes up to user programmed frequency.

**Inhibit Not Input:** Shut operation by grounding Inhibit Not pin.

**Remote Sense:** Auto adjusts output voltage for load lead losses.

**Output Adjust:** User programmable to increase/decrease output voltage setpoint.

**Active Share Bus:** Up to five units.

**Full Load Range Voltage Regulation:** Regulates down to zero applied load.

**Dual Mode Overcurrent/Short Circuit Protection:** Current mode control pulse by pulse and cyclic mode overcurrent protection.

**Internal Overvoltage Protection:** Overvoltage protected for internal (open control loop) fault.

**Built-In Filters:** MIL-STD-461F Input filter, output filtering smooths ripple and attenuates noise spikes.

#### Mechanical Design Features:

**Conduction Cooled Design:** Efficient thermal management for vacuum environments.

**Compact size, light weight:** 8.95" x 4.95" x 1.05" LWH Inches including connecting rails and thermal interface heatsink. Less than 3.2 lbs.



**Modular Devices, Inc.**



Power Conversion for Space and Military/Aerospace

Modular Devices, Inc. One Roned Road Shirley, New York 11967

Tel: 631.345.3100 Fax: 631.345.3106

E-mail: sales@mdipower.com

# 73865 500 Watt Proton Rad Hard 100K +<sup>®</sup> EMI Filtered Space Power Supply High Power DC - DC Converter

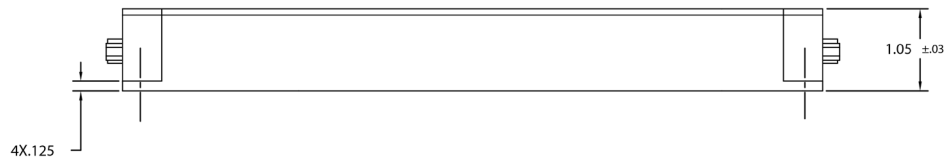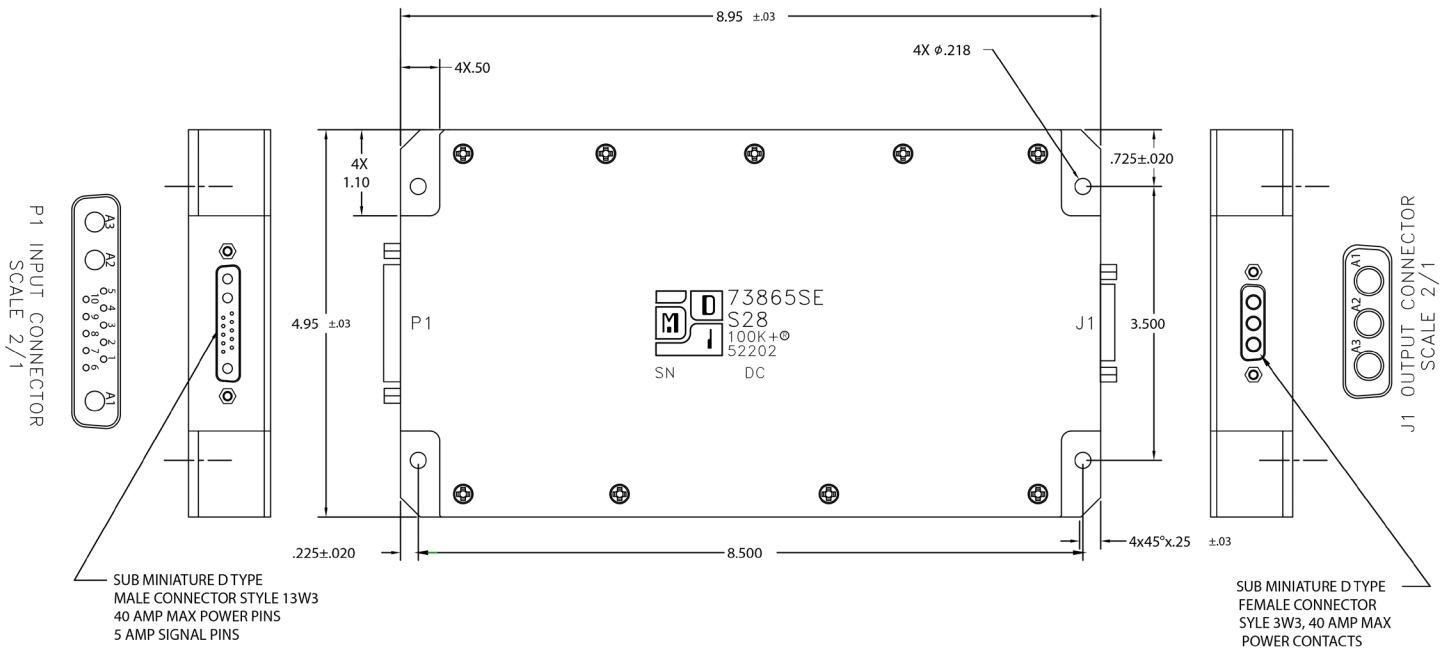

P1 CONNECTOR	
PIN	DESCRIPTION
1	Sync
2	Inhibit Not
3	UV Adjust
4	N/C
5	N/C
6	N/C
7	Share Bus
8	Adjust
9	- Remote Sense
10	+ Remote Sense
A1	Chassis Grd
A2	Input Return
A3	+30 - 75VDC Input

J1 CONNECTOR	
PIN	DESCRIPTION
A1	+28VDC @ 18A Output
A2	Output Return
A3	N/C

GRADE LEVELS:  
Please specify grade level for your application. EU grade units will be shipped if no option is specified.

EU Engineering Units  
LE 45K +100°C aerospace  
SE 100K+<sup>TM</sup>, +100°C space



**Modular Devices, Inc.**

Power Conversion for Space and Military/Aerospace